

## BCS-B-DK22812


Dome camera 2Mpx 4-system with lens 2.8~12mm



### Key features:

- Sensor 1/2.9" 2Mpx PS CMOS
- Resolution 1920×1080@30fps
- Camera 4in1: HDCVI/AHD/TVI/ANALOG
- IR cut filter with auto switch
- Digital Noise Reduction 2D/3D
- Functions AGC, ATW, AES, BLC, FLC, D-WDR
- Varifocal lens 2.8~12mm F1.2
- IR led distance up to 40m
- Outside metal casing IP65
- System change deep switch
- Menu OSD available through recorder
- Working environment -20°C ~ +60°C
- Power supply DC 12V (tolerance ±10%)

### Dimensions:

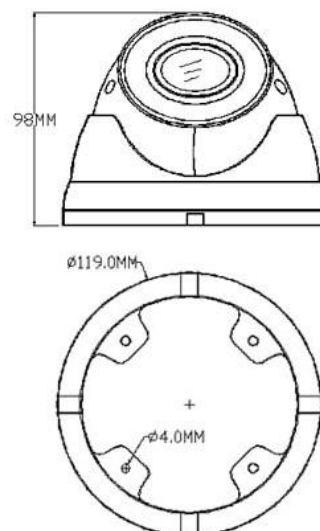

## BCS-B-DK22812

Dome camera 2Mpx 4-system with lens 2.8~12mm

### Specification:

|                        |                                                              |
|------------------------|--------------------------------------------------------------|
| Scanning system        | Progressive Scan                                             |
| System                 | HDCVI/AHD/TVI/ANALOG                                         |
| Sensor                 | 1/2.9" 2Mpx CMOS                                             |
| Chipset                | F23+FH8536H                                                  |
| Pixels                 | 1920(H) × 1080(V)                                            |
| Resolution             | 2Mpx(1920×1080)@25/30fps<br>720P(1280×720)@25/30fps          |
| Video out              | Analog: HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm |
| Minimum illumination   | Color: 0.02Lux/F1.2(AGC On)<br>B/W: 0Lux (IR On)             |
| White balance          | (ATW) Auto/manual                                            |
| Lens                   | Varifocal 2.8~12 mm F1.2                                     |
| Backlight compensation | BLC/FLC/D-WDR                                                |
| Shutter                | Auto/manual                                                  |
| Gain control           | (AGC) Auto/manual                                            |
| Noise Reduction        | 2D/3D                                                        |
| Day/night              | IR cut filter with auto-switch                               |
| IR range               | Up to 40m                                                    |
| Power supply           | 12V DC (±10%)                                                |
| Power consumption      | <5W                                                          |
| Working environment    | -20°C ~ +60°C, 10%-90%RH                                     |
| Casing                 | Metal IP65                                                   |
| Weight                 | 0.4kg                                                        |
| Dimensions             | Ø119mm×98mm                                                  |

