


VIDEO SPLITTER RV-1/2P

Specifications	Description
Number of inputs – 1 x BNC Number of outputs – 2 x BNC Bandwidth – 0-90MHz (-3dB) Input impedance – 75Ω Outputs impedance – 75Ω Power voltage – 12V DC Current consumption – 70mA Gain – 0dB Dimensions – 117x30x62mm Weight – 77g	<p>The RV-1/2P video splitter allows to split video signal from one source without any loss of quality of the signal. The device is designed for continuous work indoors. The RV-1/2P splitter works with b/w and colour cameras with both TV standarts: PAL/NTSC. It can be easily mounted on a wall. It has power LED indicator. The video splitters can be connected in series.</p>

Polarisation of the power wires

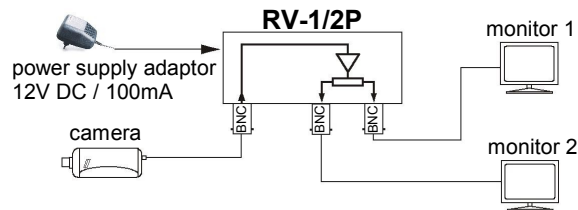


Producer: P.W. DELTA, ul. Graniczna 10, 60-713 Poznań, Poland
www.delta.poznan.pl

VIDEO SPLITTER RV-1/2P

Specifications	Description
Number of inputs – 1 x BNC Number of outputs – 2 x BNC Bandwidth – 0-90MHz (-3dB) Input impedance – 75Ω Outputs impedance – 75Ω Power voltage – 12V DC Current consumption – 70mA Gain – 0dB Dimensions – 117x30x62mm Weight – 77g	<p>The RV-1/2P video splitter allows to split video signal from one source without any loss of quality of the signal. The device is designed for continuous work indoors. The RV-1/2P splitter works with b/w and colour cameras with both TV standarts: PAL/NTSC. It can be easily mounted on a wall. It has power LED indicator. The video splitters can be connected in series.</p>

Polarisation of the power wires

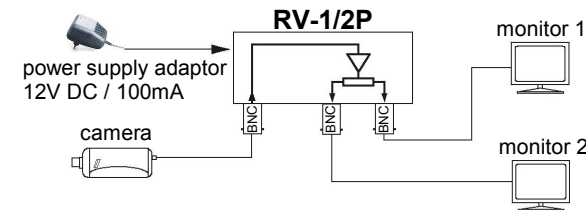


Producer: P.W. DELTA, ul. Graniczna 10, 60-713 Poznań, Poland
www.delta.poznan.pl

VIDEO SPLITTER RV-1/2P

Specifications	Description
Number of inputs – 1 x BNC Number of outputs – 2 x BNC Bandwidth – 0-90MHz (-3dB) Input impedance – 75Ω Outputs impedance – 75Ω Power voltage – 12V DC Current consumption – 70mA Gain – 0dB Dimensions – 117x30x62mm Weight – 77g	<p>The RV-1/2P video splitter allows to split video signal from one source without any loss of quality of the signal. The device is designed for continuous work indoors. The RV-1/2P splitter works with b/w and colour cameras with both TV standarts: PAL/NTSC. It can be easily mounted on a wall. It has power LED indicator. The video splitters can be connected in series.</p>

Polarisation of the power wires

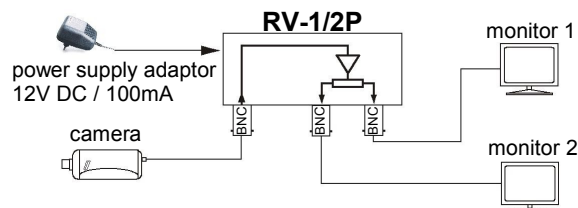


Producer: P.W. DELTA, ul. Graniczna 10, 60-713 Poznań, Poland
www.delta.poznan.pl

VIDEO SPLITTER RV-1/2P

Specifications	Description
Number of inputs – 1 x BNC Number of outputs – 2 x BNC Bandwidth – 0-90MHz (-3dB) Input impedance – 75Ω Outputs impedance – 75Ω Power voltage – 12V DC Current consumption – 70mA Gain – 0dB Dimensions – 117x30x62mm Weight – 77g	<p>The RV-1/2P video splitter allows to split video signal from one source without any loss of quality of the signal. The device is designed for continuous work indoors. The RV-1/2P splitter works with b/w and colour cameras with both TV standarts: PAL/NTSC. It can be easily mounted on a wall. It has power LED indicator. The video splitters can be connected in series.</p>

Polarisation of the power wires

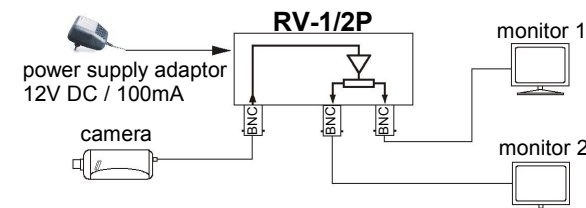

Producer: P.W. DELTA, ul. Graniczna 10, 60-713 Poznań, Poland
www.delta.poznan.pl