



VIDEO SIGNAL AMPLIFIER VCA-4/1200



VCA-4/1200 video amplifier is designed for amplification of four video signals transmitted via coaxial cables. This way it is possible to increase the route of signals up to 1200 meters. The control knobs perform both gain adjustment and correction of frequency response functions. Together with increase of gain, the correction is deeper. The amplifier should be employed at the end of transmission line i.e. by monitors. It is advised to protect all equipment against lightning discharges with the use of surge arresters (e.g. OPV-4).

SPECIFICATIONS:

Power – 12V DC

Current consumption – 90mA

Number of inputs – 4

Number of outputs – 4

Input / output impedance – 75Ω


Bandwidth – 9MHz / 1Vpp

Power socket type – DC plug 5,5/2,1mm

Dimensions – 117 x 30 x 80mm

Weight – 128g

Schematic diagram:

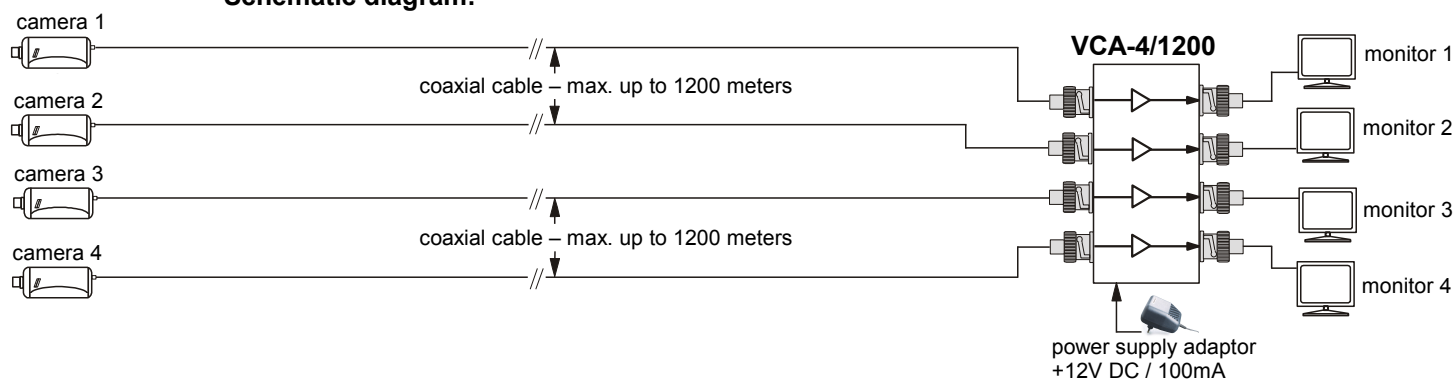

Producer: P.W. "DELTA", ul. Graniczna 10, 60-713 Poznań, Poland, www.delta.poznan.pl



VIDEO SIGNAL AMPLIFIER VCA-4/1200



VCA-4/1200 video amplifier is designed for amplification of four video signals transmitted via coaxial cables. This way it is possible to increase the route of signals up to 1200 meters. The control knobs perform both gain adjustment and correction of frequency response functions. Together with increase of gain, the correction is deeper. The amplifier should be employed at the end of transmission line i.e. by monitors. It is advised to protect all equipment against lightning discharges with the use of surge arresters (e.g. OPV-4).

SPECIFICATIONS:

Power – 12V DC

Current consumption – 90mA

Number of inputs – 4

Number of outputs – 4

Input / output impedance – 75Ω


Bandwidth – 9MHz / 1Vpp

Power socket type – DC plug 5,5/2,1mm

Dimensions – 117 x 30 x 80mm

Weight – 128g

Schematic diagram:

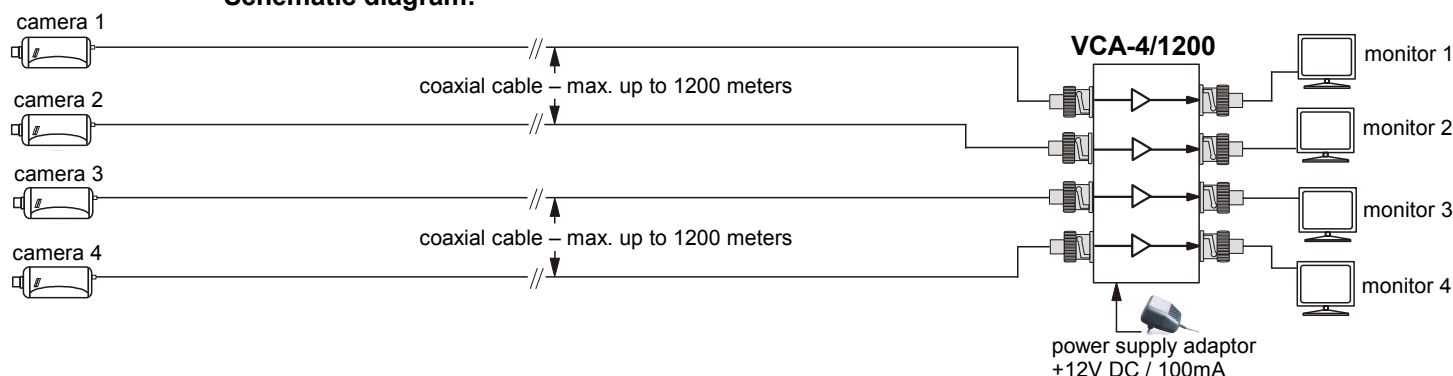

Producer: P.W. "DELTA", ul. Graniczna 10, 60-713 Poznań, Poland, www.delta.poznan.pl