



BCS-DMIP2501IR-V-Ai

Network dome camera 5Mpx with motozoom lens 2.7~13.5mm

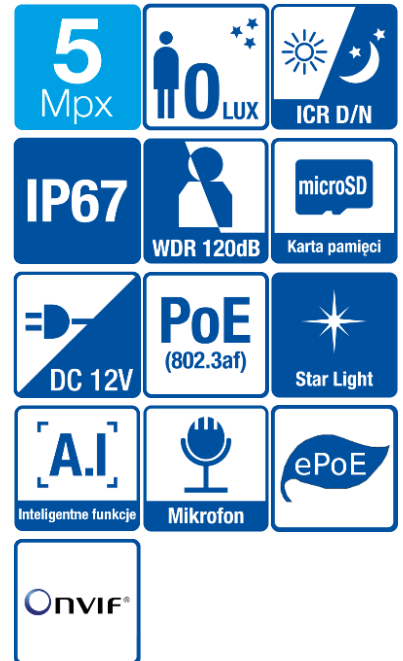

- Sensor 1/2.7" 5Mpx PS CMOS
- Starlight technology
- Compression H.265+/H.264+/MJPEG
- Triple stream coding
- IR cut filter with auto-switch
- Functions AGC, AES, AWB, BLC, HLC, WDR(120dB), ROI, 3D DNR, EIS
- Motozoom lens 2.7~13.5mm F1.5
- IR range up to 40m
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P, Onvif
- Motion detect, privacy masking
- Intelligent functions: perimeter protection, crossline, intrusion, face detect, heat map, people counting, intelligent search, abandoned/missing object
- Built-in microphone
- Outside metal casing IP67
- Edge storage microSD max. 256GB
- Power supply 12V DC / PoE(802.3af) / ePoE

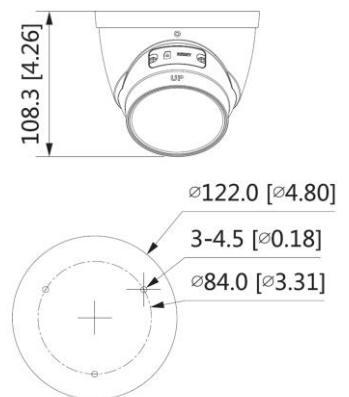

BCS-DMIP2501IR-V-Ai

Network dome camera 5Mpx with motozoom lens 2.7~13.5mm

Scanning system	Progressive Scan
System	IP
RAM/ROM	1GB/128MB
Sensor	1/2.7" 5Mpx CMOS
Pixels	2592(H) × 1944(V)
Min. illumination	0.005Lux/F1.5 (Color), 0Lux/F1.5 (IR On)
White balance	(AWB) Auto/manual
Lens	Motozoom 2.7~13.5mm F1.5
Angle of view	2592×1944 H: 100°~28°, V: 72°~21° 2688×1520 H: 104°~29°, V: 55°~16°
DORI	W: Detect 64m/ Observe 26m/ Recognize 13m/ Identify 6m T: Detect 212m/ Observe 85m/ Recognize 42m/ Identify 21m
Backlight compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1/3~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	3D DNR
Motion detect	4 areas
Privacy masking	4 areas
Image rotate	Mirror, flip 90°, 180°, 270°
Focus	Auto/manual
Day/night	IR cut filter with auto-switch
IR range	40m
Video compression	H.265 / H.265+ / H.264 / H.264+ / H.264B / H.264H / MJPEG(tylko drugi strumień)
Main stream	2592×1944@20fps, 2688×1520@25/30fps, 1920×1080@50/60fps
Second stream	D1@50/60fps
Third stream	1920×1080@25/30fps
Bitrate	H.264: 32 kbps–8192 kbps H.265: 19 kbps–8192 kbps
Audio	Built-in microphone
Audio compression	G.711a; G.711Mu; G.726; AAC; G.723
Network	RJ-45 (10/100Mbps)
Protocols	IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; 802.1x; SNMP
Compatibility	ONVIF(S,G,T); CGI; P2P
Users	Max 20 logged in
Mobile	iOS, android
Edge storage	microSD 256GB
Power supply	DC12V (±30%) / PoE(802.3af) / ePoE
Power consumption	<7.7W
Working environment	-30°C ~ +60°C, ≤ 95% RH
Casing	Metal IP67
Weight	0.74kg
Dimensions	Φ122.0 mm × 108.3 mm



BCS-DMIP2501IR-V-Ai

Network dome camera 5Mpx with motozoom lens 2.7~13.5mm

Adapter
BCS-AD2M3V



Adapter
BCS-AT135



Adapter
BCS-AT356



Wall mount
BCS-UD1

