

BCS-DMQ2200IR


Eyeball camera 4 system 2Mpx with lens 2.8mm with built-in microphone



Key features:

- 4 system camera HDCVI/AHD/TVI/ANALOG
- Sensor 1/2.7" 2Mpx PS CMOS
- Resolution up to 1080p@30fps, 720P@60fps
- IR cut filter with auto switch
- Digital Noise Reduction DNR
- Functions AGC, AWB, AES, BLC, HLC, DWDR
- Built-in microphone
- Changing systems from menu OSD through recorder
- Long distance transmission up to 800m(1080P), 1200m(720P) or UTP up to 300m(1080P), 450m(720P)
- Fixed lens 2.8mm F1.85
- Smart IR up to 50m
- Outside metal casing IP67
- Working environment -40°C ~ +60°C
- Power supply 12V DC
- Lighting protection 4KV

Dimensions:

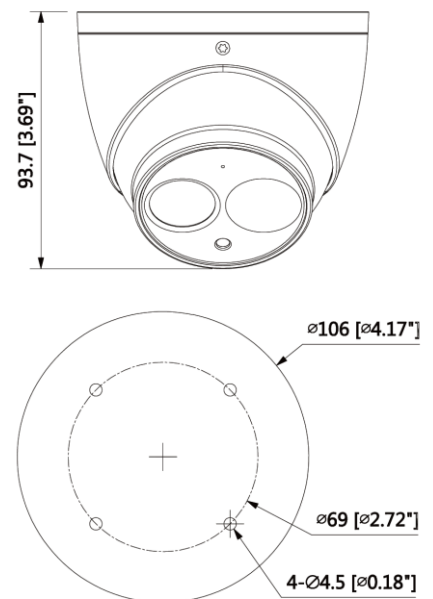

BCS-DMQ2200IR

Eyeball camera 4 system 2Mpx with lens 2.8mm with built-in microphone

Specification:

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.7" 2Mpx CMOS
Pixels	1920(H) × 1080(V)
Resolution	2Mpx(1920×1080)@25/30fps; 720P(1280×720)@25/30/50/60fps
Video out	Analog: HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	Color: 0.02Lux/F1.85/30IRE B/W: 0Lux (IR on)
S/N ratio	> 65dB
White balance	(AWB) Auto/manual
Lens	Fixed 2.8mm F1.85 angle of view H: 103°
DORI(Detect/Observe/Recognize/Identify)	37m/15m/8m/4m
Backlight compensation	BLC/HLC/DWDR
Shutter	Auto/manual
Gain control	(AGC) Auto/manual
Noise reduction	2D
Privacy masking	8 areas
Image rotate	Mirror horizontal/vertical
Day/night	IR cut filter with auto-switch
IR range	Up to 60m
Power supply	12V DC (±30%)
Power consumption	<3.6W
Working environment	-40°C ~ +60°C
Casing	Metal IP67
Weight	0.44kg
Dimensions	Φ106.0mm×93.7mm

