


BCS-DMQ2503IR3-G(-B)-II


5Mpx IR eyeball camera HDCVI/AHD/TVI/ANALOG with 2.8mm lens

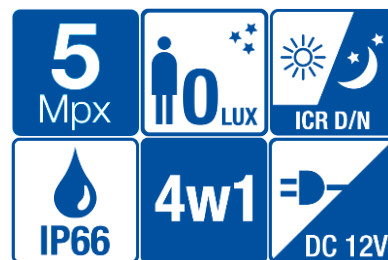

Key features:

- Sensor 1/2.7" 5Mpx STARVIS CMOS
- Resolution 2592×1944@20fps
- 4 system: HDCVI/AHD/TVI/ANALOG
- IR-cut filter with auto switch (ICR)
- Functions AGC, ATW, BLC, AES
- Digital Noise Reduction DNR
- IR leds distance up to 30m
- Screen menu OSD
- Fixed lens 2.8mm
- Protection IP66
- Working environment -30°C ~ +60°C
- System switch
- Power supply 12V DC(±10%)
- **BCS-DMQ2503IR3-B-II** – version in white

Dimensions:

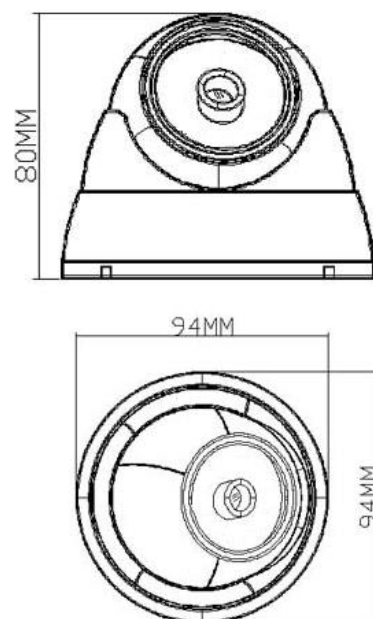

BCS-DMQ2503IR3-G(-B)-II

5Mpx IR eyeball camera HDCVI/AHD/TVI/ANALOG with 2.8mm lens

Specification:

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.7" 5Mpx CMOS FH8538M+IMX335 STARVIS
Pixels	2592(H) × 1944(V)
Resolution	AHD/TVI: 5Mpx(2592×1944)@12.5/20fps, 4Mpx(2560×1440)@15/25/30fps, 1080P(1920×1080)@25/30fps AHD/TVI/CVI: 4Mpx(2560×1440)@25/30fps, 1080P(1920×1080)@25/30fps
Video out	HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	B/W: 0Lux (IR On)
S/N ratio	>50dB
White balance	(ATW) Auto/manual
Lens	Stały 2.8mm F2.0
Backlight compensation	BLC
Shutter	Auto
Gain control	(AGC) Auto/manual
Noise Reduction	DNR - regulation
Day/Night	IR-cut filter with auto switch (ICR)
IR	IR leds distance up to 30m
Power supply	12V DC (±10%)
Power consumption	<8W
Working environment	-30°C ~ +60°C, IP66
Weight	0.25kg
Dimensions	80mm × 94mm

