

BCS-P-414RWAM(-G)

Network IR bullet camera 4Mpx with 4mm lens




Key features:

- Sensor 1/3" 4Mpx PS CMOS
- Compression H.265+/H.264+/MJPEG
- Triple stream coding
- IR-cut filter with auto switch (ICR)
- Digital Noise Reduction 2D/3D
- Functions AWB, AGC, BLC, HLC, ROI, Defog
- Wide Dynamic Range WDR(120dB)
- Motion detect, privacy masking
- Intelligent functions: crossline, intrusion, face detect, people counting, audio detect, missing/abandoned object
- IR distance up to 30m
- Fixed lens 4mm F2.0
- Outside metal casing with protection IP67
- 1 alarm in / 1 alarm out
- Built-in microphone
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), P2P, mobile app BCS(iOS, android)
- Working environment -35°C ~ +60°C
- Power supply DC12V (voltage range $\pm 25\%$) / PoE



Dimensions:

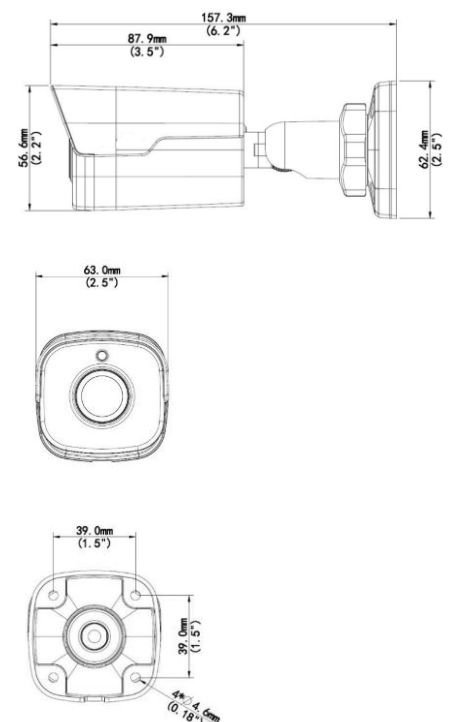

BCS-P-414RWAM(-G)

Network IR bullet camera 4Mpx with 4mm lens

Specification:

System video	IP
System scanning	Progressive Scan
Sensor	1/3" 4Mpx CMOS
Pixels	2592(H) × 1520(V)
Minimum illumination	0.03Lux/F2.0 (Color, AGC On) 0Lux(B/W, IR On)
S/N ratio	> 52dB
Lens	Fixed 4mm F2.0, angle of view H: 78.9°, V: 39.6°
White balance	(AWB) Auto/manual
Backlight compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D NR - regulation
Motion detect	4 areas (regulation: size, position, sensitivity, threshold)
Privacy masking	8 areas (regulation: size, position)
Image rotate	Mirror, flip
Focus	Auto
Day/night	IR cut filter with auto switch
IR range	Up to 30m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	4M(2592×1520) / 4M(2560×1440) / 3M(2048×1520) / 1080P(1920×1080) / 720P(1280×720) / D1(704×576) / (640×360) / 2CIF(704×288) / CIF(352×288)
Main stream	4M(2592×1520)@20fps, 4M(2560×1440)@25fps, 3M/1080P@25/30fps
Second stream	1080P/720P/D1/(640×360)/2CIF/CIF@30fps
Triple stream	D1/(640×360)/2CIF/CIF@30fps
Audio	Built-in microphone
Audio compression	G.711A / G.711U
Network	RJ-45 (10M/100MBase-TX)
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, P2P, QoS
Alarm	1 in / 1 out
Compatibility	ONVIF(Profile S, Profile T), API
Users	Max 10 logged in
Mobile users	iOS, android
Power supply	DC12V (tolerance±25%) / PoE(IEEE802.3 af)
Power consumption	Max 6W
Working environment	-35°C ~ +60°C, 10%~90% RH
Casing	Metal, protection IP67
Weight	0.45kg
Dimensions	157×62×63mm

