


Network IR bullet camera 2 Mpx with WDR and motozoom



Key features

- Sensor 1/2.8" 2 Mpx PS Starvis CMOS
- Video compression H.265 / H.264 / MJPEG
- Dual video streaming
- Motozoom lens 2.7-13.5mm F1.4
- IR-cut filter with auto switch (ICR)
- Wide Dynamic Range WDR(120dB)
- Digital Noise Reduction 3DNR
- Functions AWB, AGC, BLC, HLC, ROI
- Web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(iOS, android), P2P
- Intelligent functions: cross line, intrusion
- IR leds distance up to 60m
- Protection IP66
- Power supply DC12V / PoE
- Edge storage microSD up to 128GB

Dimensions

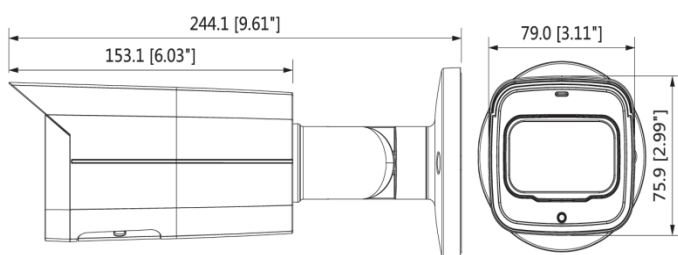

Specification

Model		BCS-TIP5201IR-V-V
Scanning system		Progressive Scan
Sensor		1/2.8" 2 Mpx Starvis CMOS
Pixels		1920(H)×1080(V)
Min. illumination		0.006Lux/F1.4(Color,1/3s,30IRE) 0.05Lux/F1.4(Color,1/30s,30IRE) 0Lux/F1.4(IR On)
S/N ratio		> 50dB
White balance		(AWB) Auto/Manual
Basic functions	Lens	2.7-13.5mm F1.4 auto DC (H:106°~29°, V:57°~17°)
	Backlight compensation	BLC/ HLC/ WDR(120dB)
	Shutter	Auto/Manual (1/3-1/100000s)
	Gain control	(AGC) Auto/Manual
	Noise Reduction	3DNR Off/On - regulation
Additional functions	Motion Detection	On/Off (4 areas - regulation)
	Privacy masking	On/Off (4 areas - regulation)
	Rotation	Mirror, flip 90°, 180°, 270°
	Focus	Auto/manual - regulation
	Day/Night	IR-cut filter with auto switch (ICR)
	IR distance	Up to 60m
Video functions	Compression	H.265/H.265+/H.264H/H.264H+/MJPEG
	Resolution	1080P(1920×1080) / SXGA(1280×1024) / 1.3M(1280×960) / 720P(1280×720) / D1(704×576) / VGA(640×480) / CIF(352×288)
	Main stream	1080P/SXGA/1.3M/720P(1~25fps)
	Second stream	D1/ VGA/ CIF(1~25fps)
	Bitrate	H.265: 12K~6400Kbps H.264: 32K~10240Kbps
Network	Ethernet	RJ-45 (10/100Base-T)
	Protocols	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, Multicast, 802.1x, easy4ip
	Compatibility	ONVIF Profile S&G, API
	Mobile	iOS, android
	Users	Max 20 logged in
Edge storage		microSD up to 128GB
Power supply		12VDC / POE (802.3at)
Power consumption		<14W
Working environment		-30°C ~ +60°C
Weight		0.81kg
Dimensions		244.1mm x 79mm x 75.9mm