

BCS-TQ5200IR-V


Bullet camera 2Mpx 4 system with motozoom 2.7~12mm lens



Key features:

- Sensor 1/2.8" 2Mpx PS CMOS
- Resolution 1920×1080@30fps
- 4 systems in1: HDCVI/AHD/TVI/ANALOG
- IR cut filter with auto switch
- Functions AGC, AWB, AES, BLC, HLC, D-WDR
- Digital Noise Reductions 2D
- Screen menu OSD
- Transmission at long distance up to 800m(1080P), 1200m(720P) and UTP do 300m(1080P), 450m(720P)
- Motozoom lens 2.7~12mm F1.8
- IR range up to 60m
- Outside metal casing with protection IP67
- Working environment -30°C ~ +60°C
- Lighting protection 4KV
- Power supply 12V DC(±30%)

Dimensions:

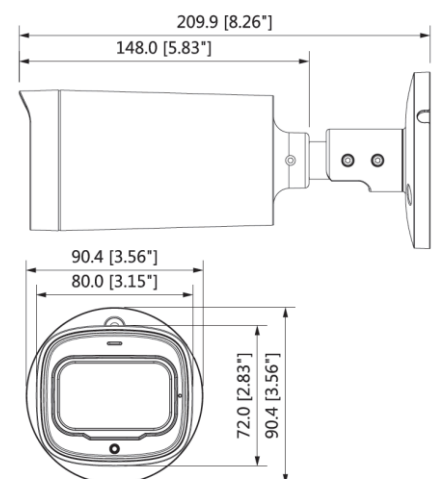

BCS-TQ5200IR-V

Bullet camera 2Mpx 4 system with motozoom 2.7~12mm lens

Specification:

Scanning system	Progressive Scan
System	HDCVI/AHD/TVI/ANALOG
Sensor	1/2.8" 2Mpx CMOS
Pixels	1920(H) × 1080(V)
Resolution	2Mpx(1920×1080)@25/30fps; 720P(1280×720)@25/30/50/60fps
Video out	Analog: HDCVI/AHD/TVI/ANALOG 1 V p-p, composite, BNC, 75 Ohm
Minimum illumination	Color: 0.005Lux/F1.8/30IRE B/W: 0Lux (IR On)
S/N ratio	> 65dB (AGC Off)
White balance	(AWB) Auto/manual
Lens	Motozoom 2.7~12 mm F1.8 angle of view H: 101.7°~32.3°
DORI(Detect/Observe/Recognize/Identify)	Wide(2.7mm): 47m/19m/9m/5m Tele(12mm): 137m/55m/27m/14m
Backlight compensation	BLC/HLC/D-WDR
Shutter	Auto
Gain control	(AGC) Auto/manual
Noise reduction	2D
Privacy masking	8 areas
Image rotate	Mirror horizontal/vertical
Day/night	IR cut filter with auto switch
IR range	Up to 60m
Power supply	12V DC (±30%)
Power consumption	<12W
Working environment	-30°C ~ +60°C
Casing	Metal IP67
Weight	0.55kg
Dimensions	209.9mm×90.4mm×90.4

