



**Electrical performance:**  
CEI EN 50393  
as applicable

**Gel:** UL 94-HB

Operating temperature

Installation temperature:   
-40°C / +50°C

Fully submersible


Can be used underground

**IP68**  
OFFICIALLY TESTED

**IP69K**  
OFFICIALLY TESTED


# Little Joint L

IP68 and IP69K, gel pre-filled micro joint, space-saver complete with connectors and with minimal aesthetic impact.

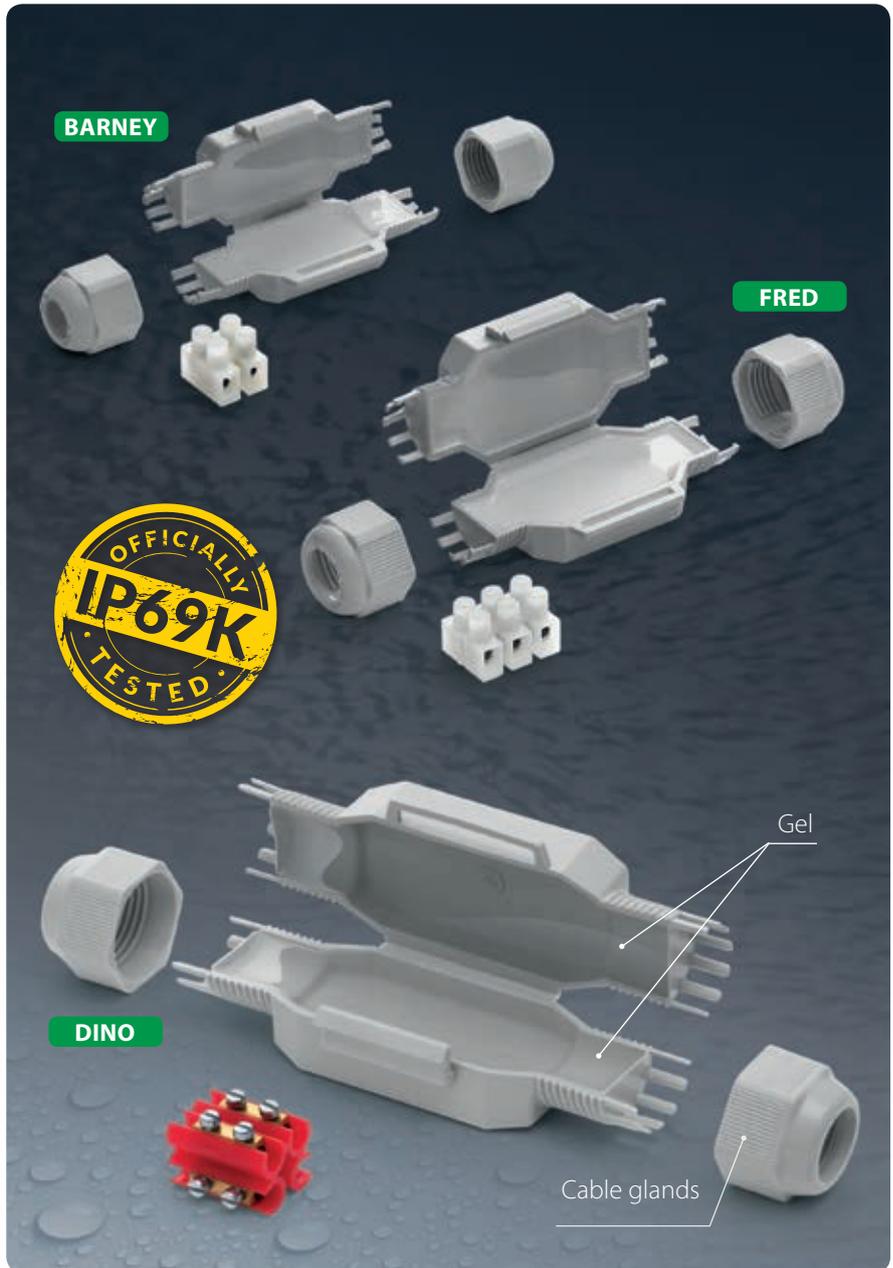

- Equipped with cable glands to avoid accidental cable traction
- Complete with screw connectors
- Pre-filled with non-toxic, non-classified gel
- Very compact and ready to use
- Always re-enterable
- Halogen free & UV resistant



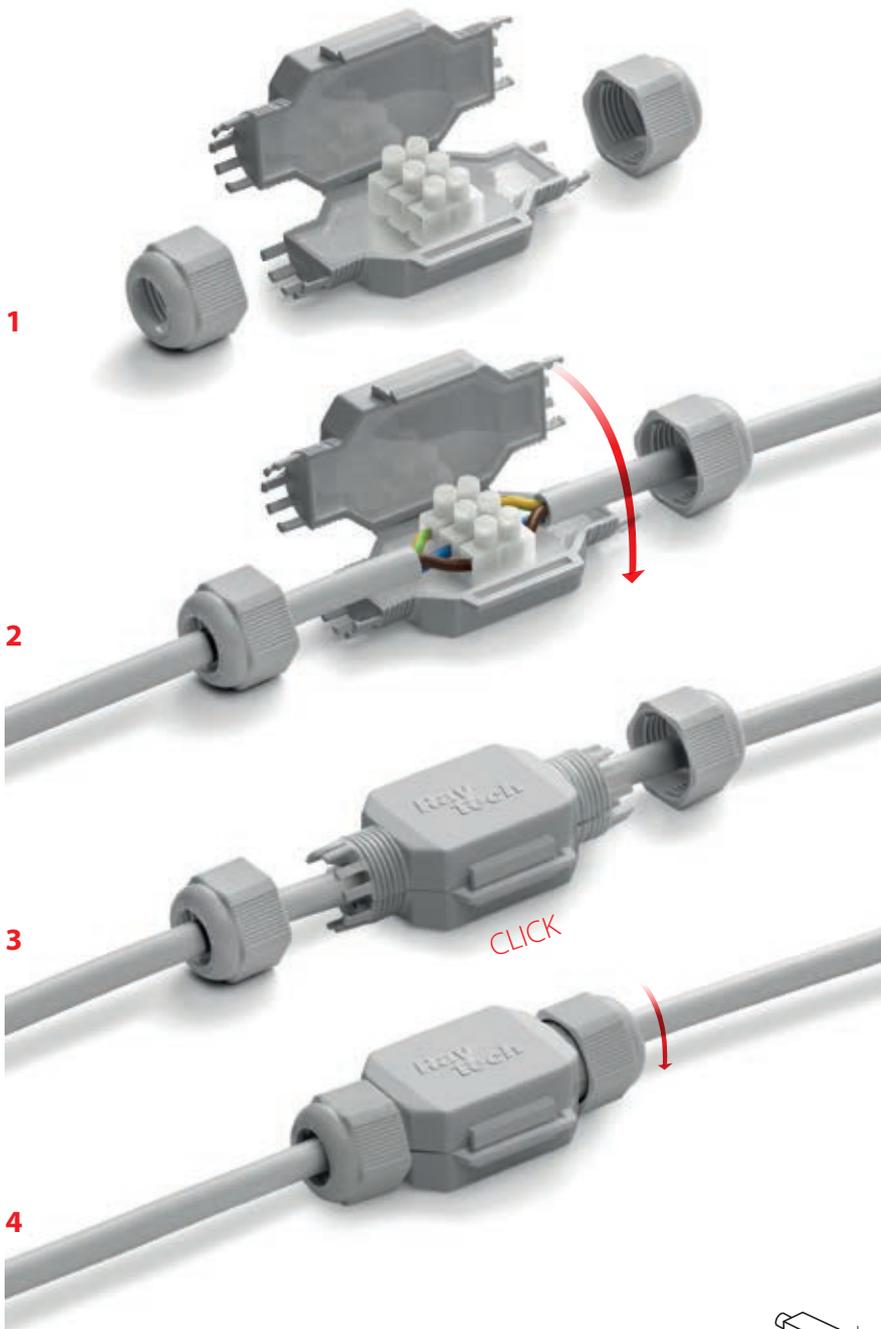

For use in traps, in lampholders for LED spotlights, especially in the presence of water and moisture, thanks to its very small size.



**LittleJoint L**

Product	Colour	Connector	Cable formation max (N° x mm²)	Ø cables min - max (mm)	Pieces / Pack	A x B x C (mm)
Barney	●				1 / Blister	
Barney - N	●		2 x 2,5	6 - 10	1 / Blister	75 x 28 x 19
Barney MP	●				10 / Multipack	
Fred	●				1 / Blister	
Fred - N	●		3 x 2,5	8 - 13	1 / Blister	80 x 36 x 23
Fred MP	●				10 / Multipack	
Fred/4	●				1 / Blister	
Fred/4 - N	●		3 x 4	8 - 13	1 / Blister	80 x 36 x 23
Dino	●				1 / Blister	
Dino - N	●		4 x 4	10 - 16	1 / Blister	125 x 43 x 35

