




JOINTS

PRE-FILLED WITH GEL
for free connections

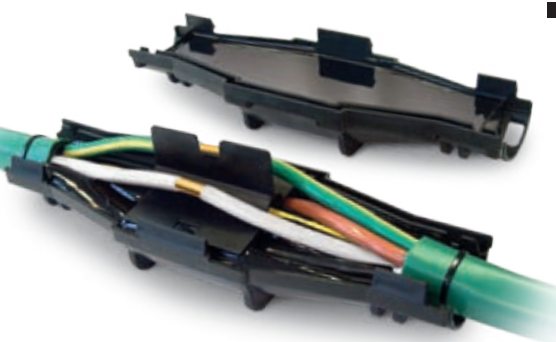

Electrical performance:
CEI EN 50393 with connectors
complying with EN 61238-1
(with testing under water head
and water between the cable cores)
Class 2 in accordance with CEI 64-8.

LV

Rapid Joint

IPX8 straight joints for 0,6/1 kV extruded cable.



For COPPER cables	Cable formation and conductor cross sections (n° x mm ²)				With optical fibre separator 4x	Dimensions A x B (mm)
Product	1x	2x	3x	4x		
Rapid Joint L6	1,5 - 50	1,5 - 10	1,5 - 10	1,5 - 6	-	105 x 55
Rapid Joint L10	2,5 - 150	2,5 - 25	2,5 - 16	2,5 - 16	-	180 x 60
Rapid Joint L25	120 - 240	6 - 50	6 - 35	4 - 35	-	210 x 65
Rapid Joint L95	185 - 400	35 - 95	25 - 70	25 - 70	16 - 50	320 x 100
For ALUMINIUM cables	1x	2x	3x	4x	4x	(mm)
Rapid Joint L 25	120 - 240	16 - 35	10 - 25	10 - 25	-	210 x 65
Rapid Joint L 95	185 - 400	35 - 95	25 - 70	25 - 70	16 - 50	320 x 100

For screened or tape
or wire armoured cables



Joint supplied with
armour continuity device

Rapid Joint S/ARM



For copper wire SCREENED cables	Cable formation and conductor cross sections (n° x mm²)				With optical fibre separator	Dimensions A x B (mm)
Product	1x	2x	3x	4x	4x	
Rapid Joint L 10-S	2,5 - 120	2,5 - 10	2,5 - 10	2,5 - 10	-	180 x 60
Rapid Joint L 25-S	120 - 185	16 - 25	10 - 25	10 - 25	-	210 x 65
Rapid Joint L 95-S	240 - 400	35 - 95	25 - 70	25 - 70	16 - 50	320 x 100
For copper tape ARMoured cables	2x	3x	4x		4x	(mm)
Rapid Joint L 10-ARM	2,5 - 10	2,5 - 10	2,5 - 10		-	180 x 60
Rapid Joint L 25-ARM	16 - 25	10 - 25	10 - 25		-	210 x 65
Rapid Joint L 95-ARM	35 - 95	25 - 70	25 - 70		16 - 50	320 x 100

For signalling and control
cables



Rapid Joint LS



Product	Conductor sections cross (mm ²)	Cable formation (n° conductors)										Dimensions A x B (mm)
		5x	7x	10x	12x	16x	19x	24x	40x	75x	100x	
Rapid Joint-LS1	1,5 2,5	•	•	•	•	•	•					180 x 60
Rapid Joint-LS2	1,5 2,5					•	•	•	•			210 x 65
Rapid Joint-LS3	1,5 2,5						•	•	•	•	•	320 x 100

Straight joints for
telephone cables



Rapid Joint T



UNScreened	SCREENED	N° pairs for conductor cross sections (n° x mm ²)	Dimensions A x B (mm)
Product	Product		
Rapid Joint-T26	Rapid Joint-TS26	(1 - 26) x (0,5 - 0,6)	180 x 60
Rapid Joint-T61	Rapid Joint-TS61	(30 + 1 - 64 + 1) x (0,5 - 0,6)	210 x 65
Rapid Joint-T101	Rapid Joint-TS101	(60 + 1 - 100 + 1) x (0,5 - 0,6)	320 x 100