


DiSeqC-Umschalter | Outdoor

DiSeqC switches | outdoor

basic-line

- a DC-Durchlass
- a Outdoor-Typen im Wetterschutzgehäuse (einfache Montage mit Kabelbindern)
- a SPU 81-00 und 81-02 zur Steuerung eines DiSeqC-Motors verwendbar
- a DC power pass
- a Outdoor types in weather-proof housing (easy to mount with cable binders)
- a SPU 81-00 and 81-02 suitable to control a DiSeqC motor

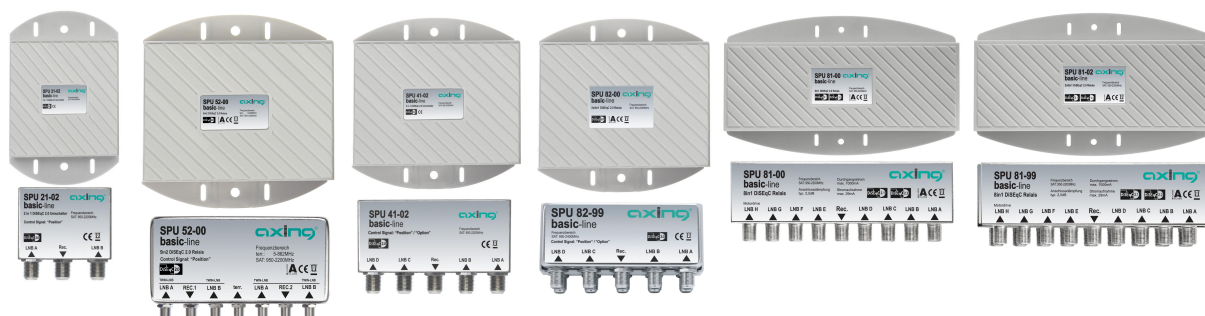

Artikel Article	SPU 21-02	SPU 52-00	SPU 41-02	SPU 82-00	SPU 81-00	SPU 81-02
Artikelnummer Part No.	SPU02102	SPU05200	SPU04102	SPU08200	SPU08100	SPU08102
Verpackungseinheit Packing unit	1					
						
Typ Type	2 in 1	2 × 2 in 1 + TERR	4 in 1	2 × 4 in 1	8 in 1	2 × 8 in 1
Schaltkriterien Switching criteria	Position	Position	Position Option	Position Option	Position + Option + Uncommitted_1 DiSeqC 1.2 "drive to position x" (6Bh)	
Unterstützte DiSeqC-Level des SAT-Empfängers Supported DiSeqC level of the SAT receiver			1.0 2.0		1.1 2.1 1.2 2.2	
Frequenzbereich (Rückkanal TERR SAT) Frequency range (return path TERR SAT)	– – 950...2200 MHz	5...65 MHz 85...862 MHz 950...2200 MHz		– – 950...2200 MHz		
Anzahl der Eingänge Number of inputs	2	5	4	2 × 4	8	2 × 8
Teilnehmeranschlüsse Subscriber ports	1	2	1	2	1	2
Durchgangsdämpfung SAT Through loss SAT	typ. 4 dB		typ. 4 dB		typ. 2,5 dB	
Entkopplung zwischen den LNBS Isolation between LNBS	³ 20 dB	³ 30 dB			³ 30 dB	
Anschlüsse Connectors	F					
Umgebungstemperaturbereich (gemäß EN 60065) Ambient temperature range (acc. to EN 60065)	-20...+50°C					
Maße (B × H × T) ca. Dimensions (W × H × D) appr.	70 × 120 × 30 mm	150 × 125 × 40 mm	110 × 120 × 30 mm	110 × 120 × 50	150 × 110 × 30	155 × 110 × 50

DiSeqC-Schaltkriterien:
 Position = Erweiterung 2 LNBS
 Option = Erweiterung 3-4 LNBS
 Uncommitted_1 = Erweiterung 5-8 LNBS
 drive to position x (6Bh) = Motorsteuerungsbefehl DiSeqC 1.2

DiSeqC switching criteria:
 Position = extension of 2 LNBS
 Option = extension of 3-4 LNBS
 Uncommitted_1 = extension of 5-8 LNBS
 Drive to position x (6Bh) = motor driving comand DiSeqC 1.2